



CONNECTED BY AVENTICS PNEUMATIC CONNECTION TECHNOLOGIES



Pneumatics
It's that easy





A reliable connection with quick release

Pneumatic tubing is just as easy to release as it is to securely connect – you just need to plug or unplug it. A captive O-ring lets you release the connection many times with little force.

The fast and easy way: tube connections with push-in fittings


Pneumatic connections should be fast and uncomplicated, leak-tight and reliable. This is made possible with the push-in fittings in our QR series. Thanks to the simple, yet brilliant concept with its quick release function, assembly and disassembly have never been so easy.

The perfect connection for a wide variety of applications

Flexibility has top priority with the QR series. This is apparent not only by the numerous shapes, sizes, and equipment variants, but also by the easy reconfiguration of the connections. Even the smallest fittings for tubing with a diameter of only 3 mm are easy to handle.

- Optimum sealing with a captive O-ring
- Straight, angled, T/Y/X form, multiple connections
- Pneumatic connection with cylindrical thread

QR series push-in fittings can be used with tubing diameters from 3 to 16 mm and are available in polymer, metal, stainless steel, and heat-resistant versions. As a result, you can always find the most suitable fittings for specific applications and industries.

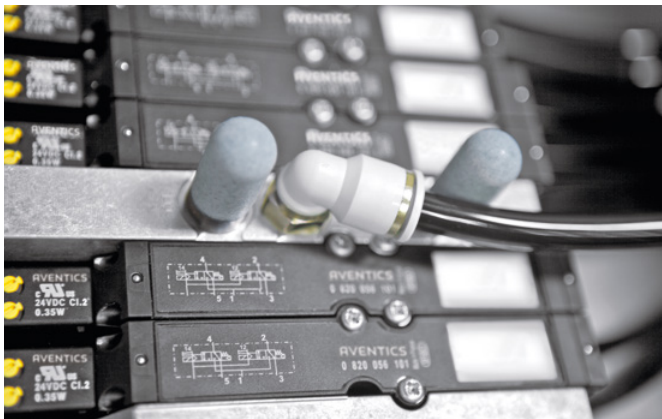

02 Connected by AVENTICS

04 Advantages of push-in fittings

05 Product range

- 06 Polymer fittings
- 12 Check-choke valves
- 13 Flow and check valves
- 14 Metal fittings


20 Compressed air tubing

22 Other fittings and accessories

23 In dialog


Advantages of the QR1 and QR2 series

Advantages of QR1

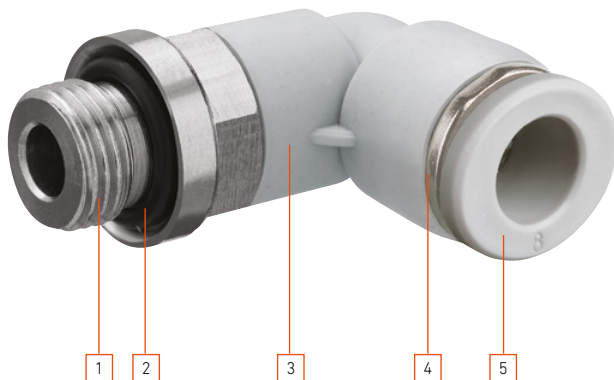

- 1 | Cylindrical threads
- 2 | Optimum sealing, also after repeated release, through captive O-ring
- 3 | Lightweight design suitable for all AVENTICS products
- 4 | Safe handling with defined pressure points
- 5 | Easy release through oval release ring with a considerably enlarged gripping surface

Advantages of QR2

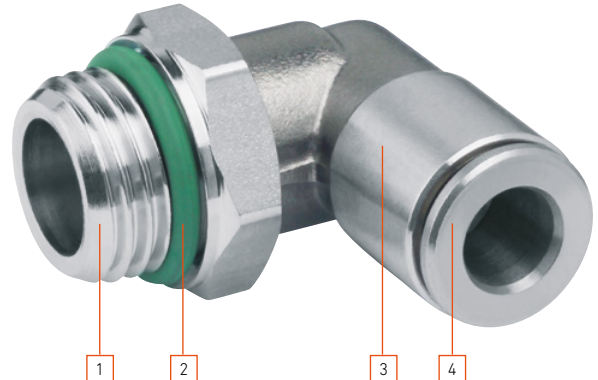

- 1 | Cylindrical threads/tapered threads
- 2 | Optimum sealing, also after repeated release, through captive O-ring
- 3 | Versions for high temperature applications with increased corrosion resistance (QR2-F and QR2-C)
- 4 | Simple connection and release via metal release ring



▲ QR1 series – With numerous variants, the “mini” and “standard” polymer fittings offer universal application options. Thanks to the compact design and low weight, ideal for all applications in automation technology – especially small handling.



▲ QR2 series – Because of their robust design, the “standard”, “stainless steel” and “heat-resistant” metal fittings are ideal for the food industry and areas in harsh environments.

The complete product range – push-in fittings at a glance


Explanation of content

This overview of our connection technology range is intended to facilitate product selection. It shows both the core and supplementary products with their individual part numbers.

LE = delivery unit

G = thread connection

Ø D = tubing connection diameter

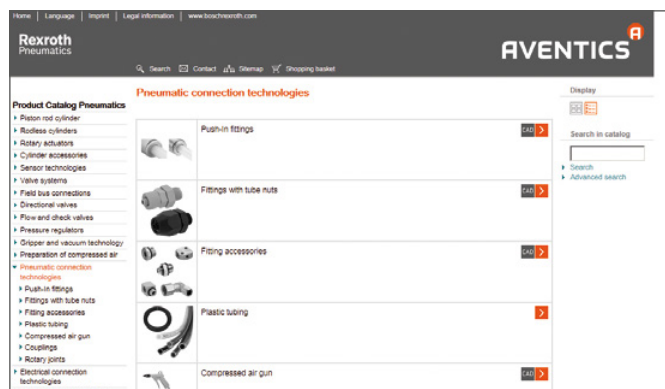

Also stop by our Internet portal

The AVENTICS Internet portal is available round the clock and supports you with all process steps – from initial product information through to delivery. With just a couple of clicks, our online catalog provides you with all important technical data, including equipment details and dimensions, and our proven online tools help you to optimize your configuration and product selection. In addition to our online information portfolio, you can also take advantage of personal consulting by our technology and industry experts at any time.

- Product range with all technical details in the online catalog
- eShop with price and supplier information in the shopping basket
- CAD download section
- D&C Scheme Editor with air consumption calculator

Content of the catalog section

- **Connections with push-in fittings** 06
QR1-S series mini
 M3 – G 1/8 thread
 Compressed air tubing Ø 3 – 6 mm
- **Connections with push-in fittings** 08
QR1-S series standard
 M5 – G 1/2 thread
 Compressed air tubing Ø 4 – 16 mm
- **Check-choke valves with push-in fitting** 12
CC04 series
 M5 – G 1/2 thread
 Compressed air tubing Ø 4 – 12 mm
- **Flow and check valves with push-in fitting** 13
QR1 series
 G 1/8 and G 1/4 thread
 Compressed air tubing Ø 4 – 12 mm
- **Connections with push-in fittings, metal** 14
QR2-S series standard
 M5 – G 1/2 thread
 Compressed air tubing Ø 4 – 16 mm
- **Connections with push-in fittings** 17
QR2-C series stainless steel
 M5 – G 1/2 thread
 Compressed air tubing Ø 4 – 12 mm
- **Connections with push-in fittings** 19
QR2-F series heat-resistant
 M5 – G 1/2 thread
 Compressed air tubing Ø 4 – 12 mm

Connections with push-in fittings QR1-S series mini

M3 – G 1/8 thread

Compressed air tubing Ø 3 – 6 mm

Straight fitting with hexagon head

QR1-S-MAN	G	Ø D	LE	
	M3	3	25	R412005116
	M3	4	25	R412005117
	M5	3	25	R412005118
	M5	4	25	R412005119
	M5	6	25	R412005120
	M6	3	25	R412005121
	M6	4	25	R412005122
	M6	6	25	R412005123
	G 1/8	4	25	R412005124
	G 1/8	6	25	R412005125



Straight fitting with hexagon socket

QR1-S-MIN	G	Ø D	LE	
	M3	3	25	R412005264
	M3	4	25	R412005265
	M5	3	25	R412005266
	M5	4	25	R412005267
	M5	6	25	R412005268
	M6	3	25	R412005269
	M6	4	25	R412005270
	M6	6	25	R412005271
	M7	4	25	R412005272
	M7	6	25	R412005273
	G 1/8	4	25	R412005274
	G 1/8	6	25	R412005275



Elbow fitting

QR1-S-MVT	G	Ø D	LE	
	M3	3	25	R412005284
	M3	4	25	R412005285
	M5	3	25	R412005286
	M5	4	25	R412005287
	M5	6	25	R412005288
	M6	3	25	R412005289
	M6	4	25	R412005290
	M6	6	25	R412005291
	M7	4	25	R412005377
	M7	6	25	R412005378
	G 1/8	4	25	R412005379
	G 1/8	6	25	R412005380




Elbow fitting, long

QR1-S-MVL	G	Ø D	LE	
	M5	4	25	R412005384
	M5	6	25	R412005385
	G 1/8	4	25	R412005390
	G 1/8	6	25	R412005391




T-union

QR1-S-MTT	G	Ø D	LE	
	M5	4	25	R412005395
	M5	6	25	R412005396
	G 1/8	4	25	R412005400
	G 1/8	6	25	R412005401



Elbow fitting

QR1-S-MLT	G	Ø D	LE	
	M5	4	25	R412005405
	M5	6	25	R412005406
	G 1/8	4	25	R412005410
	G 1/8	6	25	R412005411



Straight plug connector

QR1-S-MSK	Ø D	LE	
	3	25	R412005412
	4	25	R412005413
	6	25	R412005414



Straight plug connector, reducing

QR1-S-MSR	Ø D1	Ø D2	LE	
	4	3	25	R412005415
	6	4	25	R412005416



Bulkhead plug connector, metal


QR1-S-MSM	Ø D	LE	
	4	25	R412005418
	6	25	R412005419

**Angled plug connector**

QR1-S-MVK	Ø D	LE	
	3	25	R412005423
	4	25	R412005424
	6	25	R412005425

**Angled bulkhead connector**


QR1-S-MVS	Ø D	M	LE	
	4	M8 x 0.75	25	R412005421
	6	M8 x 0.75	25	R412005422

**T-plug connector**

QR1-S-MTK	Ø D	LE	
	3	25	R412005426
	4	25	R412005427
	6	25	R412005428

**Y-plug connector**


QR1-S-MYK	Ø D	LE	
	3	25	R412005429
	4	25	R412005430
	6	25	R412005431

**Y-plug connector, reducing**

QR1-S-MYR	Ø D1	Ø D2	LE	
	4	3	25	R412005432
	6	4	25	R412005433

**X-plug connector**

QR1-S-MXS	Ø D	LE	
	4	25	R412005435
	6	25	R412005436

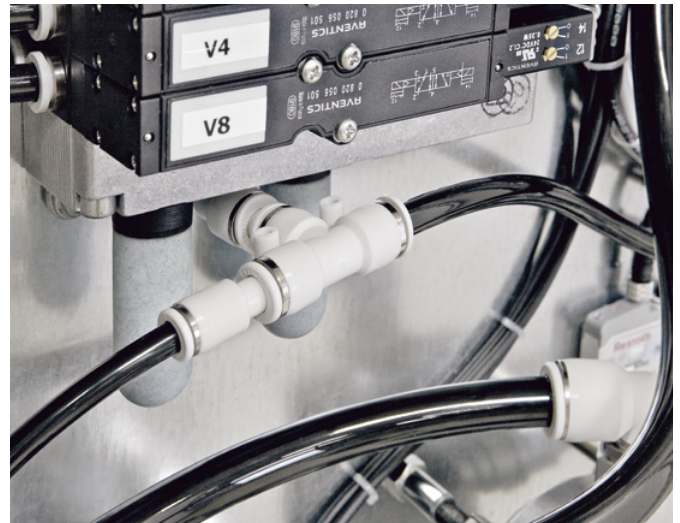**Straight push-in fitting, reducing**


QR1-S-MED	Ø D1	Ø D2	LE	
	4	3	25	R412005437
	6	4	25	R412005438

**Angled plug-in connector**


QR1-S-MVA	Ø D	LE	
	3	25	R412005439
	4	25	R412005440
	6	25	R412005441

**Y-push-in fitting**

QR1-S-MYZ	Ø D	LE	
	4	25	R412005443
	6	25	R412005444

**Y-push-in fitting, reducing**

QR1-S-M2R	Ø D1	Ø D2	LE	
	4	3	25	R412005445
	6	4	25	R412005446

**Blanking plug**

QR1-S-MBS	Ø D	LE	
	3	25	R412005447



Connections with push-in fittings QR1-S series standard

M5 – G 1/2 thread

Compressed air tubing Ø 4 – 16 mm

Straight fitting

QR1-S-RPN	G	Ø D	LE	
	M5	4	10	2121004050
	M5	6	10	2121006050
	G 1/8	4	10	2121004180
	G 1/8	6	10	2121006180
	G 1/8	8	10	2121008180
	G 1/8	10	10	R412005002
	G 1/8	12	10	R412005003
	G 1/4	4	10	2121004140
	G 1/4	6	10	2121006140
	G 1/4	8	10	2121008140
	G 1/4	10	10	2121010140
	G 1/4	12	10	2121012140
	G 3/8	6	10	R412005000
	G 3/8	8	10	2121008380
	G 3/8	10	10	2121010380
	G 3/8	12	10	2121012380
	G 3/8	14	10	2121014380
	G 3/8	16	10	R412005005
	G 1/2	8	10	R412005001
	G 1/2	10	10	2121010120
	G 1/2	12	10	2121012120
	G 1/2	14	10	2121014120
	G 1/2	16	10	R412005006



Straight female stud fitting

QR1-S-RAI	G	Ø D	LE	
	G 1/8	4	10	2121904180
	G 1/8	6	10	2121906180
	G 1/8	8	10	2121908180
	G 1/4	4	10	R412005085
	G 1/4	6	10	2121906140
	G 1/4	8	10	2121908140
	G 1/4	10	10	R412005089
	G 1/4	12	10	R412005091
	G 3/8	6	10	R412005086
	G 3/8	8	10	R412005087
	G 3/8	10	10	2121910380
	G 3/8	12	10	2121912380
	G 1/2	10	10	R412005090
	G 1/2	12	10	2121912120



Bulkhead connector

QR1-S-RSI	G	Ø D	M	LE	
	G 1/8	4	12	10	2122604180
	G 1/8	6	14	10	2122606180
	G 1/8	8	16	10	R412005232
	G 1/4	6	14	10	2122606140
	G 1/4	8	16	10	2122608140
	G 1/4	10	20	10	R412005233
	G 3/8	8	16	10	R412005231
	G 3/8	10	20	10	2122610380
	G 3/8	12	22	10	R412005235
	G 1/2	12	22	10	2122612120




Elbow fitting

QR1-S-RVT	G	Ø D	LE	
	M5	4	10	2122004050
	M5	6	10	2122006050
	G 1/8	4	10	2122004180
	G 1/8	6	10	2122006180
	G 1/8	8	10	2122008180
	G 1/8	10	10	R412005094
	G 1/8	12	10	R412005095
	G 1/4	4	10	2122004140
	G 1/4	6	10	2122006140
	G 1/4	8	10	2122008140
	G 1/4	10	10	2122010140
	G 1/4	12	10	2122012140
	G 3/8	6	10	R412005092
	G 3/8	8	10	2122008380
	G 3/8	10	10	2122010380
	G 3/8	12	10	2122012380
	G 3/8	14	5	2122014380
	G 3/8	16	5	R412005097
	G 1/2	8	10	R412005093
	G 1/2	10	10	2122010120
	G 1/2	12	10	2122012120
	G 1/2	14	5	2122014120
	G 1/2	16	5	R412005098




Elbow fitting, long

QR1-S-RVL	G	Ø D	LE	
	M5	4	10	2122104050
	M5	6	10	R412005099
	G 1/8	4	10	2122104180
	G 1/8	6	10	2122106180
	G 1/8	8	10	2122108180
	G 1/4	4	10	2122104140
	G 1/4	6	10	2122106140
	G 1/4	8	10	2122108140
	G 1/4	10	10	2122110140
	G 1/4	12	10	R412005103
	G 3/8	8	10	2122108380
	G 3/8	10	10	2122110380
	G 3/8	12	10	R412005104
	G 1/2	12	10	R412005105



Elbow screw fitting

QR1-S-RVI	G	Ø D	LE	
	G 1/8	4	10	R412005129
	G 1/8	6	10	R412005130
	G 1/8	8	10	R412005131
	G 1/4	4	10	R412005132
	G 1/4	6	10	R412005133
	G 1/4	8	10	R412005134
	G 1/4	10	10	R412005135
	G 1/8	4	10	R412005129
	G 1/8	6	10	R412005130
	G 1/8	8	10	R412005131
	G 1/4	4	10	R412005132
	G 1/4	6	10	R412005133
	G 1/4	8	10	R412005134
	G 1/4	10	10	R412005135




Swivel banjo connection, 1x

QR1-S-RW1	G	Ø D	LE	
	M5	4	10	R412005236
	M5	6	10	R412005238
	G 1/8	4	10	R412005237
	G 1/8	6	10	R412005239
	G 1/8	8	10	R412005240
	G 1/4	6	10	R412005241
	G 1/4	8	10	R412005242
	G 1/4	10	10	R412005243
	G 3/8	8	5	R412005244
	G 3/8	10	5	R412005245
	G 3/8	12	5	R412005246



Swivel banjo connection, 2x

QR1-S-RW2	G	Ø D	LE	
	G 1/8	4	10	R412005141
	G 1/8	6	10	R412005144
	G 1/8	8	10	R412005147
	G 1/4	6	10	R412005145
	G 1/4	8	10	R412005148
	G 3/8	8	10	R412005149
	G 3/8	10	5	R412005152
	G 1/2	12	5	R412005155




T-union

QR1-S-RTT	G	Ø D	LE	
	M5	4	10	2122204050
	M5	6	10	R412005201
	G 1/8	4	10	2122204180
	G 1/8	6	10	2122206180
	G 1/8	8	10	2122208180
	G 1/8	10	10	R412005205
	G 1/4	4	10	2122204140
	G 1/4	6	10	2122206140
	G 1/4	8	10	2122208140
	G 1/4	10	10	2122210140
	G 1/4	12	10	R412005206
	G 3/8	6	10	R412005203
	G 3/8	8	10	2122208380
	G 3/8	10	10	2122210380
	G 3/8	12	10	2122212380
	G 3/8	14	10	2122214380
	G 1/2	10	10	2122210120
	G 1/2	12	5	2122212120
	G 1/2	14	5	2122214120




T-banjo connection

QR1-S-RTS	G	Ø D	LE	
	G 1/8	6	10	R412005292
	G 1/8	8	10	R412005293
	G 1/4	6	10	R412005294
	G 1/4	8	10	R412005295



Elbow fitting

QR1-S-RLT	G	Ø D	LE	
	M5	4	10	2122304050
	M5	6	10	R412005212
	G 1/8	4	10	2122304180
	G 1/8	6	10	2122306180
	G 1/8	8	10	R412005214
	G 1/4	4	10	R412005211
	G 1/4	6	10	2122306140
	G 1/4	8	10	2122308140
	G 1/4	10	10	R412005215
	G 1/4	12	5	R412005216
	G 3/8	8	10	2122308380
	G 3/8	10	10	2122310380
	G 3/8	12	5	2122312380
	G 1/2	10	10	2122310120
	G 1/2	12	5	2122312120



Y-fitting

QR1-S-RAY	G	Ø D	LE	
	G 1/8	4	10	2122404180
	G 1/8	6	10	2122406180
	G 1/8	8	10	2122408180
	G 1/4	4	10	2122404140
	G 1/4	6	10	2122406140
	G 1/4	8	10	2122408140
	G 1/4	10	10	2122410140
	G 3/8	8	10	R412005221
	G 3/8	10	10	2122410380
	G 3/8	12	10	2122412380
	G 1/2	10	10	2122410120
	G 1/2	12	10	2122412120



Straight plug connector

QR1-S-RSK	Ø D	LE	
	4	10	2121504000
	6	10	2121506000
	8	10	2121508000
	10	10	2121510000
	12	10	2121512000
	14	5	2121514000
	16	5	R412005059



Straight plug connector, reducing

QR1-S-RSR	Ø D1	Ø D2	LE	
	6	4	10	R412005060
	8	4	10	R412005061
	8	6	10	R412005062
	10	6	10	R412005063
	10	8	10	R412005064
	12	8	10	R412005065
	12	10	10	R412005066
	16	12	5	R412005067




Bulkhead plug connector, metal

QR1-S-RSM	Ø D	M	LE	
	4	M12 x 1.0	10	2121404000
	6	M14 x 1.0	10	2121406000
	8	M16 x 1.0	10	2121408000
	10	M20 x 1.0	10	2121410000
	12	M22 x 1.0	10	2121412000



Bulkhead plug connector, plastic

QR1-S-RSC	Ø D	M	LE	
	4	M12 x 1.5	10	R412005051
	6	M14 x 1.5	10	R412005052
	8	M16 x 1.5	10	R412005053
	10	M20 x 2.0	10	R412005054
	12	M24 x 2.0	10	R412005055




Angled plug connector

QR1-S-RVK	Ø D	LE	
	4	10	2121204000
	6	10	2121206000
	8	10	2121208000
	10	10	2121210000
	12	10	2121212000
	14	5	2121214000
	16	5	R412005033



Angled bulkhead connector

QR1-S-RVS	M	Ø D	LE	
	M12 x 1.5	4	10	R412005056
	M14 x 1.5	6	10	R412005057
	M16 x 1.5	8	10	R4120050575
	M20 x 1.5	10	10	R4120050576



Plug connector, reducing, 3x

QR1-S-RMT	Ø D1	Ø D2	LE	
	6	4	10	R412005346
	8	4	10	R412005347
	8	6	10	R412005348
	10	6	10	R412005349
	10	8	10	R412005350



T-plug connector

QR1-S-RTK	Ø D	LE	
	4	10	2121104000
	6	10	2121106000
	8	10	2121108000
	10	10	2121110000
	12	10	2121112000
	14	5	2121114000
	16	5	R412005025




T-plug connector, reducing

QR1-S-RTR	Ø D1	Ø D2	LE	
	6	4	10	R412005026
	8	4	10	R412005027
	8	6	10	R412005028
	10	6	10	R412005029
	10	8	10	R412005030
	12	8	10	R412005031
	12	10	10	R412005032



Y-plug connector

QR1-S-RYK	Ø D	LE	
	4	10	2121804000
	6	10	2121806000
	8	10	2121808000
	10	10	2121810000
	12	10	2121812000




Y-plug connector, reducing

QR1-S-RYR	Ø D1	Ø D2	LE	
	6	4	10	2121806040
	8	4	10	R412005081
	8	6	10	2121808060
	10	8	10	2121810080
	10	6	10	R412005082
	12	10	10	R412005080

**Y-plug connector, reducing, 2x**

QR1-S-RYD	Ø D1	Ø D2	LE	
	6	4	10	R412005344
	8	6	10	R412005345

**X-plug connector**

QR1-S-RXS	Ø D	LE	
	4	10	R412005361
	6	10	R412005362
	8	10	R412005363
	10	10	R412005364

**Straight push-in fitting, reducing**

QR1-S-RED	Ø D1	Ø D2	LE	
	6	4	10	2121706040
	8	4	10	2121708040
	8	6	10	2121708060
	10	4	10	2121710040
	10	6	10	2121710060
	10	8	10	2121710080
	12	6	10	2121712060
	12	8	10	2121712080
	12	10	10	2121712100
	14	8	5	2121714080
	14	10	5	2121714100
	14	12	5	2121714120

**Angled plug-in connector**

QR1-S-RVA	Ø D	LE	
	4	10	2121304040
	6	10	2121306060
	8	10	2121308080
	10	10	2121310100
	12	10	R412005036

**Angled plug-in connector, long**


QR1-S-RLL	Ø D	LE	
	4	10	R412005039
	6	10	R412005040
	8	10	R412005041
	10	10	R412005042
	12	10	R412005043

**Angled plug-in connector, reducing**


QR1-S-RVR	Ø D1	Ø D2	LE	
	6	4	10	2121304060
	8	6	10	2121306080
	10	8	10	R412005034

**T-push-in fitting**


QR1-S-RTC	Ø D	LE	
	4	10	2122706000
	8	10	2122708000
	12	10	R412010596

**Y-push-in fitting**


QR1-S-RY2	Ø D	LE	
	4	10	R412005332
	6	10	R412005333
	8	10	R412005334
	10	10	R412005335
	12	10	R412005336

**Y-push-in fitting, reducing**

QR1-S-R2R	Ø D1	Ø D2	LE	
	6	4	10	R412005337
	8	6	10	R412005338
	10	8	10	R412005339
	12	10	10	R412005340

**Y-push-in fitting, reducing, 2x**

QR1-S-RY4	Ø D1	Ø D2	LE	
	6	4	10	R412005341
	8	4	10	R412005342



Sealing cap

QR1-S-RCA	Ø D	LE	
	4	20	R412005111
	6	20	R412005112
	8	20	R412005113
	10	20	R412005114
	12	20	R412005115

Blanking plug

QR1-S-RBS	Ø D	LE	
	4	20	2123204000
	6	20	2123206000
	8	20	2123208000
	10	20	2123210000
	12	20	2123212000
	14	10	2123214000
	16	10	R412005331

Connection piece

QR1-S-RDS	Ø D	LE	
	4	20	2123104000
	6	20	2123106000
	8	20	2123108000
	10	20	2123110000
	12	20	2123112000

Connection piece, reducing

QR1-S-RDR	Ø D1	Ø D2	LE	
	6	4	10	R412005323
	8	4	10	R412005324
	8	6	10	R412005325
	10	6	10	R412005326
	10	8	10	R412005327
	12	8	10	R412005328
	12	10	10	R412005329

Check-choke valves with push-in fitting

CC04 series

M5 – G 1/2 thread

Compressed air tubing Ø 4 – 12 mm

Check-choke valve, exhaust

CC04	G	Ø D	LE	
	M5	4	1	R412010564
	M5	6	1	R412010565
	G 1/8	4	1	R412010568
	G 1/8	6	1	R412010569
	G 1/8	8	1	R412010570
	G 1/4	6	1	R412010571
	G 1/4	8	1	R412010572
	G 1/4	10	1	R412010573
	G 3/8	8	1	R412010574
	G 3/8	10	1	R412010575
	G 3/8	12	1	R412010576
	G 1/2	10	1	R412010577
	G 1/2	12	1	R412010578

Check-choke valve, supply

CC04	G	Ø D	LE	
	M5	4	1	R412010581
	M5	6	1	R412010582
	G 1/8	4	1	R412010585
	G 1/8	6	1	R412010586
	G 1/8	8	1	R412010587
	G 1/4	6	1	R412010588
	G 1/4	8	1	R412010589
	G 1/4	10	1	R412010590
	G 3/8	8	1	R412010591
	G 3/8	10	1	R412010592
	G 3/8	12	1	R412010593
	G 1/2	10	1	R412010594
	G 1/2	12	1	R412010595



Flow and check valves with push-in fitting QR1 series

G 1/8 and G 1/4 thread

Compressed air tubing Ø 4 - 12 mm

Straight non-return valve with push-in fitting

QR1-ANR	G	Ø D	LE	
	G 1/8	4	5	R412005565
	G 1/8	6	5	R412005566
	G 1/4	6	5	R412005568
	G 1/4	8	5	R412005569




Straight fitting, self-locking

QR1-AAN	G	Ø D	LE	
	G 1/8	4	10	R412005526
	G 1/8	6	10	R412005527
	G 1/4	6	10	R412005528
	G 1/4	8	10	R412005529



Plug connector with non-return valve

QR1-SKR	Ø D	LE	
	4	5	R412005573
	6	5	R412005574
	8	5	R412005575
	10	2	R412005576
	12	2	R412005577




Plug connector, self-locking

QR1-ASK	Ø D	LE	
	4	10	R412005547
	6	10	R412005548
	8	10	R412005549
	10	10	R412005550




3/2-way stop valve, thread/push-in fitting

QR1-AGS	G	Ø D	LE	
	G 1/8	6	5	R412005470
	G 1/8	8	5	R412005471
	G 1/4	6	5	R412005472
	G 1/4	8	5	R412005473




3/2-way stop valve, push-in fitting/thread

QR1-ASG	G	Ø D	LE	
	G 1/8	6	5	R412005459
	G 1/8	8	5	R412005460
	G 1/4	6	5	R412005461
	G 1/4	8	5	R412005462




3/2-way stop valve, push-in fitting

QR1-ASC	Ø D	LE	
	6	5	R412005482
	8	5	R412005483
	10	5	R412005484
	12	5	R412005485




Check-choke valve, block shape

QR1-DBS	Ø D	LE	
	4	5	R412005454
	6	5	R412005455
	8	5	R412005456
	10	2	R412005457
	12	2	R412005458



Ball valve, push-in fitting

QR1-BSK	Ø D	LE	
	6	5	R412005502
	8	5	R412005503
	10	5	R412005504
	12	5	R412005505



Connections with push-in fittings, metal QR2-S series standard

M5 – G 1/2 thread

Compressed air tubing Ø 4 – 16 mm

Straight fitting

QR2-S-RPN	G	Ø D	LE	
	M5	4	25	1823373038
	M5	6	25	1823373040
	M7	4	25	1823373100
	M7	6	25	1823373088
	G 1/8	4	25	1823373041
	G 1/8	6	25	1823373043
	G 1/8	8	10	1823373044
	G 1/4	4	25	1823373045
	G 1/4	6	25	1823373047
	G 1/4	8	10	1823373048
	G 1/4	10	10	1823373049
	G 1/4	12	10	1823391809
	G 3/8	8	10	1823373050
	G 3/8	10	10	1823373051
	G 3/8	12	5	1823373052
	G 3/8	14	5	1823373053
	G 1/2	12	5	1823373054
	G 1/2	14	5	1823373055
	G 1/2	16	1	R412007955



Push-in connector

QR2-S-RAS	G	Ø D	LE	
	M5	4	25	1823373056
	M5	6	25	1823373058
	M7	4	10	1823373101
	M7	6	10	1823373102
	G 1/8	4	25	1823373059
	G 1/8	6	25	1823373061
	G 1/8	8	25	1823373062
	G 1/4	4	25	1823373063
	G 1/4	6	25	1823373065
	G 1/4	8	25	1823373066
	G 1/4	10	10	1823373067
	G 1/4	12	10	1823391810
	G 3/8	8	10	1823373068
	G 3/8	10	10	1823373069
	G 3/8	12	10	1823373070
	G 3/8	14	10	1823373071
	G 1/2	12	10	1823373072
	G 1/2	14	10	1823373073



Straight female stud fitting

QR2-S-RAI	G	Ø D	LE	
	G 1/8	4	10	1823391643
	G 1/8	6	10	1823391645
	G 1/8	8	10	1823391646
	G 1/4	4	10	1823391647
	G 1/4	5	10	1823391648
	G 1/4	6	10	1823391649
	G 1/4	8	10	1823391650




Push-in connector, long

QR2-S-RAL	G	Ø D	LE	
	M7	4	10	1823391887
	M7	6	10	1823391888
	G 1/8	4	10	1823373074
	G 1/8	6	10	1823373075
	G 1/8	8	10	1823373076
	G 1/4	6	10	1823373077
	G 1/4	8	10	1823373078
	G 1/4	10	10	1823373079




Bulkhead connector

QR2-S-RSI	G	Ø D	LE	
	G 1/8	4	10	1823391757
	G 1/8	6	10	1823391758
	G 1/8	8	10	1823391760
	G 1/4	6	10	1823391759
	G 1/4	8	10	1823391761




Elbow fitting

QR2-S-RVT	G	Ø D	LE	
	M5	4	10	1823391709
	M5	6	10	1823391889
	M7	4	10	1823391885
	M7	6	10	1823391886
	G 1/8	4	10	1823391710
	G 1/8	6	10	1823391711
	G 1/8	8	10	1823391712
	G 1/8	10	10	R412007687
	G 1/4	4	10	1823391713
	G 1/4	6	10	1823391714
	G 1/4	8	10	1823391715
	G 1/4	10	5	1823391718
	G 1/4	12	5	1823391843
	G 3/8	8	10	1823391716
	G 3/8	10	5	1823391717
	G 3/8	12	5	1823391838
	G 3/8	14	5	1823391839
	G 1/2	10	5	R412007589
	G 1/2	12	5	1823391840
	G 1/2	14	5	1823391841
	G 1/2	16	1	R412007956




Elbow fitting, long

QR2-S-RVL	G	Ø D	LE	
	G 1/8	4	10	R412010270
	G 1/8	6	10	R412010271
	G 1/8	8	10	R412010272
	G 1/4	6	10	R412010273
	G 1/4	8	10	R412010274




Swivel banjo connection, 1x

QR2-S-RW1	G	Ø D	LE	
	M5	4	10	1823391549
	M5	6	10	1823391905
	G 1/8	4	10	1823391551
	G 1/8	6	10	1823391553
	G 1/8	8	10	1823391554
	G 1/4	6	10	1823391556
	G 1/4	8	10	1823391557
	G 1/4	10	5	1823391558
	G 3/8	8	5	1823391559
	G 3/8	10	5	1823391560
	G 3/8	12	5	1823391561




Swivel banjo connection, 1x, hexagon socket

QR2-S-RI1	G	Ø D	LE	
	M5	4	10	1823391652
	G 1/8	4	10	1823391654
	G 1/8	6	10	1823391656
	G 1/8	8	10	1823391657
	G 1/4	6	10	1823391658
	G 1/4	8	10	1823391659
	G 1/4	10	10	1823391660
	G 1/4	12	10	1823391927
	G 3/8	8	2	1823391897
	G 3/8	10	2	1823391898
	G 3/8	12	2	1823391899




Swivel banjo connection, 2x

QR2-S-RI2	G	Ø D	LE	
	G 1/8	4	10	1823391913
	G 1/8	6	10	1823391914
	G 1/8	8	10	1823391915
	G 1/4	6	10	1823391916
	G 1/4	8	10	1823391917
	G 1/4	10	10	1823391918
	G 1/4	12	10	1823391919




Swivel banjo connection, 3x

QR2-S-RI3	G	Ø D	LE	
	G 1/8	4	10	1823391920
	G 1/8	6	10	1823391921
	G 1/8	8	10	1823391922
	G 1/4	6	10	1823391923
	G 1/4	8	10	1823391924
	G 1/4	10	10	1823391925
	G 1/4	12	10	1823391926




T-union

QR2-S-RTT	G	Ø D	LE	
	M5	4	10	1823391812
	G 1/8	4	10	1823391813
	G 1/8	6	10	1823391814
	G 1/8	8	10	1823391815
	G 1/4	4	10	1823391816
	G 1/4	6	10	1823391817
	G 1/4	8	10	1823391818
	G 1/4	10	10	1823391819
	G 1/4	12	10	1823391823
	G 3/8	8	10	1823391820
	G 3/8	10	10	1823391821
	G 3/8	12	10	1823391822
	G 1/2	14	10	1823391824




T-banjo connection, hexagon socket

QR2-S-RTI	G	Ø D	LE	
	M5	4	10	1823391661
	G 1/8	4	10	1823391663
	G 1/8	6	10	1823391665
	G 1/8	8	10	1823391666
	G 1/4	6	10	1823391667
	G 1/4	8	10	1823391668
	G 1/4	10	10	1823391669
	G 1/4	10	10	1823391660
	G 3/8	8	2	1823391900
	G 3/8	10	2	1823391901
	G 3/8	12	2	1823391902




T-banjo connection

QR2-S-RTS	G	Ø D	LE	
	M5	4	10	1823391562
	G 1/8	4	10	1823391564
	G 1/8	6	10	1823391566
	G 1/8	8	10	1823391567
	G 1/4	6	10	1823391568
	G 1/4	8	10	1823391569
	G 1/4	10	5	1823391570
	G 3/8	8	5	1823391571
	G 3/8	10	5	1823391572
	G 3/8	12	5	1823391573




Elbow fitting

QR2-S-RLT	G	Ø D	LE	
	M5	4	10	1823391825
	G 1/8	4	10	1823391826
	G 1/8	6	10	1823391827
	G 1/8	8	10	1823391828
	G 1/4	4	10	1823391829
	G 1/4	6	10	1823391830
	G 1/4	8	10	1823391831
	G 1/4	10	10	1823391832
	G 1/4	12	5	1823391836
	G 3/8	8	10	1823391833
	G 3/8	10	10	1823391834
	G 3/8	12	5	1823391835
	G 1/2	14	5	1823391837




Bulkhead plug connector

QR2-S-RSM	G	Ø D	LE	
	4	M10x1	10	1823391636
	6	M14x1	10	1823391638
	8	M16x1	10	1823391639
	10	M17x1	10	1823391640
	12	M20x1	5	1823391641
	14	M22x1	5	1823391642



Straight plug connector

QR2-S-RSK	G	Ø D	LE	
	4	M10x1	10	1823386077
	6	M14x1	10	1823386079
	8	M16x1	10	1823386080
	10	M17x1	10	1823386081
	12	M20x1	5	1823386082
	14	M22x1	5	1823386083



Angled plug connector

QR2-S-RVK	G	Ø D	LE	
	4	M10x1	10	1823380012
	6	M14x1	10	1823380014
	8	M16x1	10	1823380015
	10	M17x1	10	1823380016
	12	M20x1	5	1823380017
	14	M22x1	5	1823380018




T-plug connector

QR2-S-RTK	G	Ø D	LE	
	4	M10x1	10	1823381043
	6	M14x1	10	1823381045
	8	M16x1	10	1823381046
	10	M17x1	10	1823381047
	12	M20x1	5	1823381048
	14	M22x1	5	1823381049




Straight push-in fitting, increasing

QR2-S-REE	Ø D1	Ø D2	LE	
	4	6	10	1823391628
	6	8	10	1823391890



Straight push-in fitting, reducing

QR2-S-RED	Ø D1	Ø D2	LE	
	6	4	10	1823391615
	8	4	10	1823391617
	8	6	10	1823391619
	10	6	10	1823391620
	10	8	10	1823391621
	12	4	10	1823391622
	12	6	10	1823391623
	12	8	10	1823391624
	12	10	5	1823391903
	14	4	5	1823391625
	14	6	5	1823391626
	14	8	5	1823391627
	14	10	5	1823391842
	14	12	10	1823391811



Angled plug connector

QR2-S-RVA	Ø D	LE	
	4	10	R412004851
	6	10	R412004852
	8	10	1823391942
	10	10	1823391943
	12	10	1823391944
	14	10	R412010739

Blanking plug

QR2-S-RBS	Ø D	LE	
	4	25	1823391607
	6	25	1823391609
	8	25	1823391610
	10	25	1823391611
	12	10	1823391612
	14	10	1823391613

Connection piece

QR2-S-RDS	Ø D	LE	
	4	25	1823391629
	6	25	1823391631
	8	25	1823391632
	10	25	1823391633
	12	10	1823391634
	14	10	1823391635
	16	10	R412010191

Connections with push-in fittings

QR2-C series stainless steel

M5 - G 1/2 thread

Compressed air tubing Ø 4 - 12 mm

Straight fitting

QR2-C-RPN	G	Ø D	LE	
	M5	4	2	2544004050
	G 1/8	4	2	R412004890
	G 1/8	6	2	R412004891
	G 1/8	8	2	R412004892
	G 1/4	6	2	R412004893
	G 1/4	8	2	R412004894
	G 1/4	10	2	R412004895
	G 3/8	10	2	R412004896
	G 3/8	12	2	R412004897

Banjo bolt, 1x, with 2 sealing rings

QR2-C-RH1	G	LE	
	G 1/8	2	R412004978
	G 1/4	2	R412004979

Elbow fitting

QR2-C-RVT	G	Ø D	LE	
	M5	4	2	R412005617
	G 1/8	4	2	R412004898
	G 1/8	6	2	R412004899
	G 1/8	8	2	R412004900
	G 1/4	6	2	R412004901
	G 1/4	8	2	R412005616
	G 3/8	10	1	R412004902
	G 3/8	12	1	R412004903

Banjo union, 1x, without sealing ring

	QR2-C-RV1		G		LE	
	G 1/8	4	2	R412004973		
	G 1/8	6	2	R412004974		
	G 1/8	8	2	R412004975		
	G 1/4	6	2	R412004976		
	G 1/4	8	2	R412004977		

T-union

QR2-C-RTT	G	Ø D	LE	
	M5	4	2	R412004889
	G 1/8	4	2	R412004904
	G 1/8	6	2	R412004905
	G 1/8	8	2	R412004906
	G 1/4	6	2	R412004907
	G 1/4	8	2	R412004908

**Straight plug connector**


QR2-C-RSK	Ø D	LE	
	4	2	R412004982
	6	2	R412004983
	8	2	R412004984
	10	2	R412004985
	12	2	R412004986

**Bulkhead plug connector**

QR2-C-RSM	G	Ø D	LE	
	M12x1	4	2	2544404000
	M14x1	6	2	2544406000
	M16x1	8	2	2544408000
	M18x1	10	2	2544410000
	M20x1	12	2	2544412000

**Bulkhead connector**

QR2-C-RSG	G	LE	
	G 1/8	2	R412004961
	G 1/4	2	R412004962
	G 3/8	2	R412004963
	G 1/2	1	R415009442

**Angled plug connector**


QR2-C-RVK	Ø D	LE	
	4	2	2544204000
	6	2	2544206000
	8	2	2544208000
	10	2	2544210000
	12	2	2544212000

**T-plug connector**

QR2-C-RTK	Ø D	LE	
	4	2	2544304000
	6	2	2544306000
	8	2	2544308000
	10	2	2544310000
	12	2	2544312000

**Straight push-in fitting, reducing**

QR2-C-RED	Ø D1	Ø D2	LE	
	6	4	2	2544506040
	8	6	2	2544508060
	10	8	2	2544510080

**Straight fitting, tapered**



QR2-C-RPN	G	Ø D	LE	
	R 1/8	4	2	2544004180
	R 1/8	6	2	2544006180
	R 1/8	8	2	2544008180
	R 1/4	4	2	2544004140
	R 1/4	6	2	2544006140
	R 1/4	8	2	2544008140
	R 1/4	10	2	2544010140
	R 3/8	10	1	2544010380
	R 3/8	12	1	2544012380
	R 1/2	12	1	2544012120

**Elbow fitting, tapered**

QR2-C-RVT	G	Ø D	LE	
	R 1/8	4	2	2544004180
	R 1/8	6	2	2544006180
	R 1/8	8	2	2544008180
	R 1/4	6	2	2544006140
	R 1/4	8	2	2544008140
	R 1/4	10	2	2544010140
	R 3/8	10	1	2544010380
	R 3/8	12	1	2544012380
	R 1/2	12	1	2544012120

**T-union, tapered**

QR2-C-RTT	G	Ø D	LE	
	R 1/8	4	2	R412004968
	R 1/8	6	2	R412004969
	R 1/8	8	2	R412004970
	R 1/4	6	2	R412004971
	R 1/4	8	2	R412004972
	R 1/4	10	2	R412004909
	R 3/8	10	1	R412004910

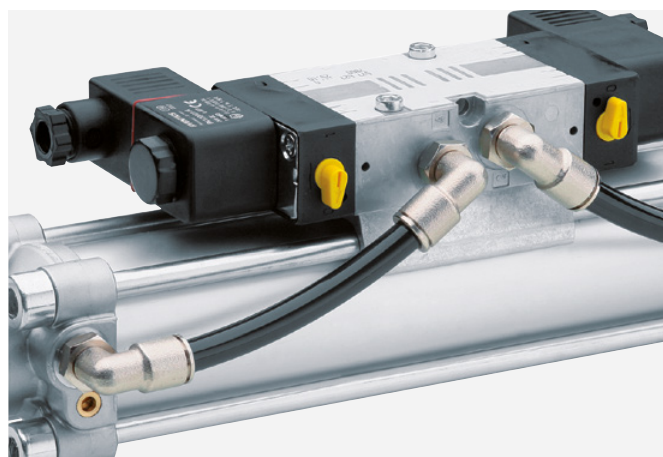

Connections with push-in fittings

QR2-F series heat-resistant

M5 - G 1/2 thread

Compressed air tubing Ø 4 - 12 mm

Straight fitting, heat-resistant

QR2-F-RPN	G	Ø D	LE	
	M5	4	25	1823373089
	M5	6	25	1823373090
	G 1/8	4	25	1823373091
	G 1/8	6	25	1823373092
	G 1/8	8	25	1823373093
	G 1/4	4	25	1823373094
	G 1/4	6	25	1823373095
	G 1/4	8	10	1823373096
	G 1/4	10	10	1823373097
	G 1/4	12	10	R412007625
	G 3/8	8	10	1823373098
	G 3/8	10	10	1823373099
	G 1/2	12	10	R412007730



Bulkhead plug connector, heat-resistant

QR2-F-RSM	Ø D	LE	
	6	10	R412007629
	8	10	R412007628
	10	10	R412007627
	12	5	R412007626



Straight plug connector, heat-resistant

QR2-F-RSK	Ø D	LE	
	4	10	1823386100
	6	10	1823386101
	8	10	1823386102
	10	10	1823386103



Straight female stud fitting, heat-resistant

QR2-F-RAI	G	Ø D	LE	
	G 1/8	4	10	1823391857
	G 1/8	6	10	1823391858
	G 1/8	8	10	1823391859
	G 1/4	6	10	1823391860
	G 1/4	8	10	1823391861




Angled plug connector, heat-resistant

QR2-F-RVK	Ø D	LE	
	4	10	1823380019
	6	10	1823380020
	8	10	1823380021
	10	10	1823380022



Elbow fitting, heat-resistant

QR2-F-RVT	G	Ø D	LE	
	M5	4	10	1823391870
	M5	6	10	R412007681
	G 1/8	4	10	1823391871
	G 1/8	6	10	1823391872
	G 1/8	8	10	1823391873
	G 1/4	6	10	1823391874
	G 1/4	8	10	1823391875
	G 1/4	10	10	1823391876
	G 1/4	12	5	R412007624
	G 3/8	8	5	1823391877
	G 3/8	10	5	1823391878
	G 3/8	12	5	R412007623
	G 1/2	12	5	R412007731



T-plug connector, heat-resistant

QR2-F-RTK	Ø D	LE	
	4	10	1823381050
	6	10	1823381051
	8	10	1823381052
	10	10	1823381053
	12	10	R412007732



Straight push-in fitting, heat-resistant, reducing

QR2-F-RED	Ø D1	Ø D2	LE	
	8	6	10	R412007682
	10	6	10	R412007683



Compressed air tubing made of polyurethane (PUR)

TU1-S-PUR

Dimensions	Length	Black	Blue	Red	Natural
[mm]	[m]				
3 x 0.6	50	1820712068	1820712067	1820712066	1820712069
4 x 0.75	25	-	-	1820712020	-
4 x 0.75	50	R412009984	R412009985	-	R412014554
4 x 0.75	100	1820712018	1820712036	1820712026	1820712007
6 x 1.05	25	-	-	1820712022	-
6 x 1.05	50	R412009987	R412009988	-	R412014556
6 x 1.05	100	1820712019	1820712037	1820712027	1820712006
8 x 1.15	25	-	-	1820712023	-
8 x 1.15	50	R412009989	R412009990	-	R412014557
8 x 1.15	100	1820712016	1820712038	1820712028	1820712008
10 x 1.25	25	1820712015	-	1820712025	-
10 x 1.25	50	-	R412009991	-	R412014558
10 x 1.25	100	1820712081	1820712039	1820712029	1820712009
12 x 1.5	25	1820712014	-	1820712024	-
12 x 1.5	50	-	R412009992	-	R412014559
12 x 1.5	100	1820712017	1820712040	1820712083	1820712082
14 x 2	25	R412004778	R412004782	-	R412004790
14 x 2	100	R412004779	R412004783	-	-
16 x 2.5	25	R412004780	R412004784	-	R412004792
16 x 2.5	100	R412004781	R412004785	R412004789	R412004793

TU1-F-PUR FOOD

Dimensions	Length	Translucent red	Translucent blue	Translucent black	Natural
[mm]	[m]				
4 x 0.75	25	-	R412004796	R412009963	R412004797
6 x 1.05	25	R412009901	1820712044	1820712043	1820712042
8 x 1.25	25	R412004994	1820712047	1820712046	1820712045
10 x 1.5	25	-	R412004798	R412009964	R412004799
10 x 1.5	100	R412014560	-	-	-
12 x 2	25	-	R412009965	-	R412009967
12 x 2	100	R412009949	-	R412009948	-

TU1-E-PUR ECONOMY

Dimensions	Length	Black	Blue	Natural
[mm]	[m]			
4 x 0.75	500	R412007824	R412007825	R412007823
6 x 1	500	R412007827	R412007828	R412007826
8 x 1.15	500	R412007830	R412007831	R412007829
10 x 1.25	400	-	R412007834	-
12 x 1.5	300	-	R412007837	-

TU1-A-PUR

Dimensions	Length	Black
[mm]	[m]	
4 x 0.75	50	1820712089
6 x 1.05	50	1820712091
8 x 1.15	50	1820712092
10 x 1.25	50	1820712093

TU1-X-PUR FLAMEX

Dimensions	Length	Black
[mm]	[m]	
4 x 1	25	1820712084
8 x 2	25	1820712085
10 x 2	25	1820712086
12 x 2	25	1820712087
14 x 2	25	1820712088

TU2-S-PUR DUO

Dimensions	Length	Black-blue
[mm]	[m]	
4 x 0.75	25	1820712070
6 x 1.05	25	1820712072
8 x 1.15	25	1820712073
10 x 1.25	25	1820712074

The right material for every application

AVENTICS has a high-quality range of polymer tubing in different materials and qualities that complies with specific technical or economic factors.

Series	TU1-S-PUR	TU1-F-PUR	TU1-E-PUR	TU1-A-PUR	TU1-X-PUR	TU1-S-PAM	TU1-S-PET	TU1-S-TEF	TU1-S-PVC
Anti-static	-	-	-	+	-	-	-	-	-
Resistant to microbes	○	+	○	+	+	++	++	++	+
Flame protection (UL94V), resistant to welding sparks	-	-	-	-	+	UL94HB	-	++	-/○
Halogen-/fluorine-free	+	+	+	+	+	++	++	- ¹	-
Resistance to hydrolysis	○	+	○	+	+	++	++	++	+
Suitable for dynamic laying	+	+	+	+	+	+	+	○ ²	-
UV resistant	○	○	○	+	+	+	○	++	-
High pressure resistance	+	+	-	+	+	++	-	○ ³	+/++

++ highly recommended + recommended ○ suitable - less suitable

¹Fluoropolymer ²not in general; must be checked in individual cases ³dependent on temperature



Compressed air tubing made of polyamide (PAM)

TU1-S-PAM

Dimensions	Length	Black	Natural
[mm]	[m]		
4 x 1	25	1820712110	1820712100
6 x 1	25	1820712111	1820712101
8 x 1	25	1820712112	1820712102
10 x 1	25	1820712115	1820712105
12 x 1,5	25	1820712113	1820712103
14 x 1,5	25	1820712114	1820712104

TU1-S-PAM HIGH FLOW

Dimensions	Length	Blue
[mm]	[m]	
4 x 0.5	25	R412009913
4 x 0.5	100	R412009914
6 x 0.65	25	R412009915
6 x 0.65	100	R412009917
8 x 0.8	25	R412009918
8 x 0.8	100	R412009920
10 x 1	25	R412009921
10 x 1	100	R412009923
12 x 1.1	25	R412009924
12 x 1.1	100	R412009926
14 x 1.25	25	R412009927
16 x 1.35	25	R412009929

You can find compressed air tubing in additional colors and sizes in our product offering

- Single tubing, duo tubing, and spiral tubing
- Polyurethane (PUR), polyamide (PAM), Teflon (TEF), polyethylene terephthalate (PET), and polyvinyl chloride (PVC)

Pneumatic connection technology without push-in fittings for special applications

Couplings

From standard lock couplings with various connection types to safety couplings.



Coupling with tube nut, CP1 series



Coupling with external thread, CP1 series

Fittings with tube nuts

The range includes plastic and metal standard variants as well as additional special forms.



Fittings with tube nuts, NU1 series, plastic, and NU2 series, metal

Throttle valves, check-choke valves, non-return valves

Also available in versions with an integrated silencer or for use as a screw-in throttle. Some versions also suitable for direct installation in piping.



Check-choke valve, CH01 and CH02 series



Non-return valve, NR01 and NR02 series



Other connector accessories

The product range includes blanking plugs and connectors in many shapes and with tailored connections.



Double-nipple fitting, FPT series



Blanking plug, FPT series

Flow and check valves

Shut-off valves, manual spool valves, quick exhaust valves



Shut-off valve



ML manual spool valve



Quick exhaust valve, 573 series

In dialog with our customers and partners

Based on proven expertise and a first-class product range

Our understanding of cooperation goes well beyond individual projects. We are constantly in dialog with our customers and are always a competent contact for both technical and economic questions. The know-how contained in our comprehensive pneumatic product range gives us a solid foundation for our work.

- Cylinders and sensor technology
- Valves, valve systems, field bus connections
- Gripper and vacuum technology
- Compressed air preparation, assembly material, accessories

Understanding our customers allows us to respond more quickly and give us a head start in achieving tailor-made solutions. Thus, we always remain close to the action and ensure the technological lead for us and our customers.



Around-the-clock information

The AVENTICS Internet Portal never sleeps. In the online catalog, you can find additional information covering the entire product range, including all technical details, as well as the use of user-friendly Engineering Tools, www.engineering-tools.com



www.engineering-tools.com

Our offer for you: Your individual QR trolley!

For our customers with high demands, we offer the special AVENTICS QR trolley for practical parts storage. The QR trolley is a robust modular system for fittings and accessories, which can be individually equipped as needed. You always have the right accessories at hand, clearly arranged and in ample quantities – even last-minute needs are covered. If you are interested, please get in touch with your contact directly.



Advantages

- ✓ On-site availability of accessories at all times
- ✓ No warehouse administration and capital commitment
- ✓ Increased delivery flexibility
- ✓ No logistical risks
- ✓ Reduced process costs

AVENTICS

www.aventics.com

info@aventics.com

Follow us:



Germany

AVENTICS GmbH
Ulmer Straße 4
30880 Laatzen, Germany
Tel +49 511 2136-522
Fax +49 511 2136-163
www.aventics.de

USA

AVENTICS Corporation
PO Box 13597
1953 Mercer Road (40511)
Lexington, KY 40512
Tel +1 859 254-8031
www.aventics.us

China

AVENTICS Group
2002 Unit, Asdendas Plaza, No 333
Tianyaoqiao Road, Xuhui district
Shanghai, China, 200030
Tel +86 21 2426 9666
www.aventics.cn

Further contacts

www.aventics.com/contact

Your contact:



The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.